



PRODUCT CATALOG

THE KENDA ADVANTAGE.

We are the Engineers, Chemists, Manufacturers plus Assemblers of world class tires and wheels.

At Kenda Americana Tire and Wheel (KATW), we strive to supply the best trailer tires, wheels and assemblies in the world. We can do that through the power of the Kenda family of companies where our team develops our own designs, as well as tests

and manufactures our own tires and wheels. As part of a global organization with over 12,000 employees, we have access to the best minds and materials on the planet.

No matter where your journey takes you, Kenda ATW is here to carry the load for you.



Tire Manufacturing




Wheel Manufacturing



Assembly



Compound Development

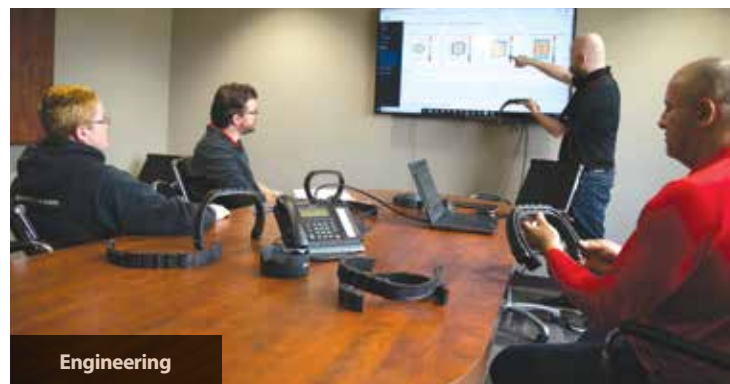

Engineering



Testing + R&D



Warehousing


UNDERSTANDING A TIRE SIDEWALL



Tire Size: **ST205/75R15** | **LOAD RANGE C** | **M**

- | | |
|---|--|
| A. Tire Type
(ST = Special Trailer) | D. Construction Type
(R = Radial, D = Bias) |
| B. Width of tire in millimeters | E. Wheel diameter in inches |
| C. Aspect Ratio
(Ratio of height to width) | F. Load index |
| | G. Speed rating |

UNDERSTANDING TIRE CONSTRUCTION

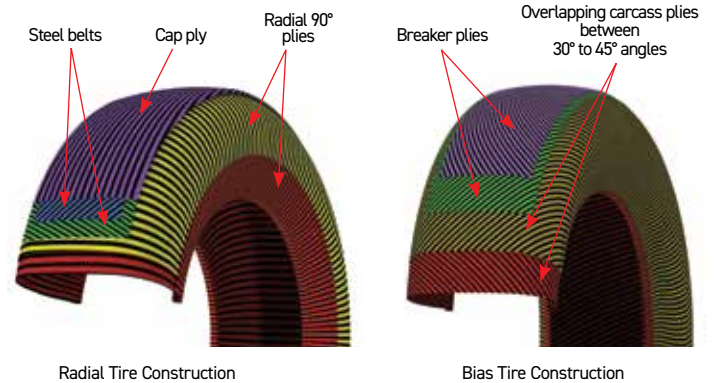

- A radial tire has steel belts that are oriented at a significantly different angle than the 90 degree radial plies. This allows the sidewall and tread to function as two independent features of the tire.
- A bias tire consists of multiple rubber plies over lapping each other at a 30-45 degree angle. The tread and sidewalls are interdependent because all plies have a consistent angle. The overlapped plies form a thick layer that is less flexible which makes it able to carry a heavier load and less trailer sway.
- Bias tires are typically used for local use: construction, agriculture or utility. Radial tires are often seen on longer distance trailers like RVs, marine and livestock trailers.

WHEEL MATCHING

The diameters listed below represent the recommended sizes for wheel mounting faces. The dimensions indicated are for the flat contact that interface with the hub.

BOLT PATTERN	HUB DIAMETER	WHEEL DIAMETER	VALVE HOLE	STUD SIZE	WHEEL BOLT TORQUE
4 on 4.0"	5.50"	12" & 13"	.45	1/2" -20 -60*	50-75 LB/FT
5 on 4.5"	6.50"	12" & 13"	.45	1/2" -20 -60*	50-75 LB/FT
5 on 4.5"	6.50"	14" & 15"	.45	1/2" -20 -60*	90-120 LB/FT
5 on 5"	6.50"	15"	.45	1/2" -20 -60*	90-120 LB/FT
6 on 5.5"	7.4"	14.5" & 15"	.45	1/2" -20 60*	90-120 LB/FT
6 on 5.5"	7.4"	16" & 16.5"	.625	1/2" -20 60*	90-120 LB/FT
6 on 5.5"	7.4"	16" & 16.5"	.625	9/16" -18 60*	175-225 LB/FT
8 on 6.5"	8.25"	14.5"	.45	5/8" -18 90*	175-225 LB/FT
8 on 6.5"	8.25"	16" & 16.5"	.625	1/2" -20 60*	90-120 LB/FT
8 on 6.5"	8.25"	16" & 16.5"	.625	9/16" -18 60*	175-225 LB/FT
8 on 6.5"	8.25"	16" & 16.5"	.625	5/8" -18 90*	175-225 LB/FT
8 on 6.5"	Hub Piloted	14.5"	.45	5/8" -18 Flange	275-325 LB/FT
8 on 6.5"	Hub Piloted	16", 16.5" & 17.5"	.625	5/8" -18 Flange	275-325 LB/FT

TIRE SPEED RATING CHART

J	62mph
L	75mph
M	81mph
N	87mph
Q	100mph

Always follow posted speed limit

LOAD RANGE	PLY RATING
B	4
C	6
D	8
E	10
F	12
G	14
H	16
J	18



shown on AM08 wheel



DESIGNED AND ENGINEERED IN THE USA

LOADSTAR RADIAL KR03 PLUS

Setting New Standards for Consumer Safety, Reliability and Longevity.

The Kenda Americana KR03Plus is thoughtfully engineered for owners who value advanced technology and dependable quality.


Built to stand up to real-world challenges—heavy loads, long distances, and unpredictable weather. Every detail, from reinforced sidewalls to advanced tread design, is crafted to help owners travel farther, worry less, and stay focused on the journey ahead. Designed to equip trailers for the realities of the road, the KR03Plus stands up to enduring wear, changing weather, and the bumps and scrapes of every adventure. Choosing the KR03Plus means selecting a tire that resists wear and shields against everyday impacts, ensuring dependable performance mile after mile.

With the KR03Plus, drivers gain a premium solution that sets new standards in the trailer tire category. Backed by Kenda's legacy of innovation and American engineering, the KR03Plus is built to keep every journey rolling smoothly, wherever the road may lead.

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
15503	ST205/75R14	D	7.8	26.1	2200	75
15505	ST205/75R15	D	7.9	26.9	2200	70
15507	ST225/75R15	E	8.7	28.2	2860	80
15508	ST235/80R16	E	9.2	30.8	3520	80

KEY FEATURES:

- Decoupling shoulder groove is designed to minimize irregular wear and extend tread life
- Enhanced siping technology increases traction on wet surfaces, ensuring safer towing in rain and challenging road conditions
- Optimized block stiffness promotes uniform tread wear for a smoother, quieter ride
- The Max PSI shield, molded directly into the sidewall, makes it easy to check and maintain proper tire pressure at a glance
- Ozone-resistant sidewall compound helps guard against weathering and cracking
- Integrated sidewall scuff guards offer added defense against curb and trailer bumps
- Built-in rim protectors help protect wheels from everyday bumps and scrapes, preserving their appearance throughout every journey
- Computer-optimized pitch sequencing reduces road noise

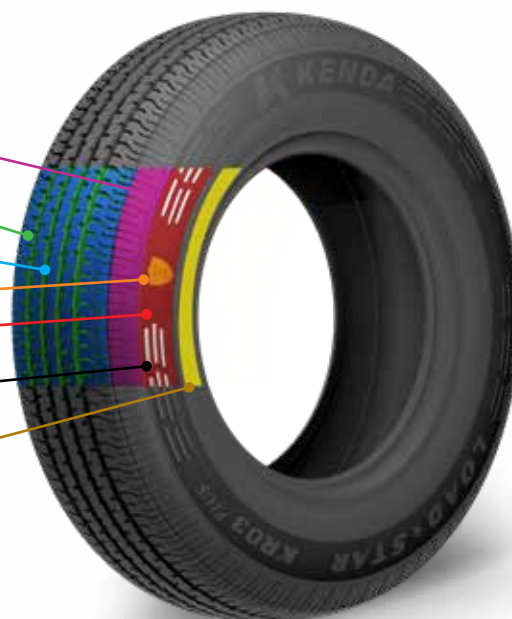



shown on AM01 Gun Metal wheel



LOADSTAR RADIAL KR03

- Premium all-season tire
- Well designed shoulder blocks for even wear & reduced heat build up
- Endurance tread compound for durability

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
10199	ST175/80R13	C	6.9	24.1	1375	50
10210	ST175/80R13	D	6.9	24.1	1650	70
10201	ST185/80R13	C	7.2	24.7	1480	50
10208	ST185/80R13	D	7.2	24.7	1710	65
10234	ST205/75R14	C	8.0	26.3	1925	60
10235	ST205/75R14	D	8.0	26.3	2200	75
10229	ST215/75R14	C	8.5	26.8	1870	50
10244	ST205/75R15	C	8.1	27.3	1820	50
10245	ST205/75R15	D	8.1	27.3	2200	65
10256	ST225/75R15	D	8.9	28.4	2540	65
10303	ST225/75R15	E	8.9	28.4	2860	80
10246	ST235/80R16	D	9.4	30.9	3000	65
10248	ST235/80R16	E	9.4	30.9	3500	90



shown on AM04 Matte Black Machined wheel



LOADSTAR RADIAL KR35

- Midrange tire with a smooth, quiet ride
- Silica infused tread for increased ride control in wet weather

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)	RIM (INCH)
10204	ST175/80R13	C	6.8	24.1	1375	50	13x5
10211	ST175/80R13	D	6.8	24.1	1650	70	13x5
10205	ST185/80R13	C	7.2	24.6	1477	50	13x5
10206	ST185/80R13	D	7.2	24.6	1709	65	13x5
10223	ST205/75R14	C	8.0	26.3	1925	60	14x5.5
10225	ST205/75R14	D	7.9	26.3	2200	75	14x5.5
10308	ST215/75R14	C	8.5	26.8	1870	50	14x5.5
10237	ST205/75R15	C	8.0	27.3	1820	50	15x5.5
10212	ST205/75R15	D	7.9	27.3	2200	65	15x5.5
10253	ST225/75R15	D	8.6	28.5	2540	65	15x6
10304	ST225/75R15	E	8.6	28.5	2860	80	15x6
10249	ST235/80R16	D	9.1	30.7	3000	65	16x6.5
10247	ST235/80R16	E	9.2	30.7	3500/3197*	90	16x6.5
10502	ST235/85R16	E	9.3	31.6	3640/3200*	95	16x6.5

*DUAL

TRAILER TIRES



LOADSTAR RADIAL KR53 ST

The Kenda Karrier Loadstar KR53 trailer tire was designed to offer exceptional performance for the value-driven customer. This durable, radial tire features the performance you would expect from a LoadStar tire.

Engineered to combine LoadStar® durability with less weight for enhanced low-rolling resistance for better fuel economy on long trips. The wide circumferential grooves provide superior wet traction for additional peace of mind if the weather takes a turn for the worse.

The Kenda LoadStar KR53 also features a proprietary sidewall compound that resists the harsh and damaging effects of the sun to provide more worry-free miles for your travels. The KR53 is a well-rounded tire that delivers high marks in endurance, tread wear, weight and fuel economy that make it a great tire choice for your towing needs.



shown on AMO1 Gun Metal wheel



PART #	SIZE	PLY	S.W. (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
15300	ST145/80R12	E/10	5.7	21.0	1520	80
15301	ST175/80R13	C/6	6.7	23.8	1360	50
15302	ST185/80R13	C/6	7	24.4	1480	50
15303	ST205/75R14	D/8	7.8	25.9	2200	75
15304	ST205/75R15	C/6	7.8	26.9	1820	50
15305	ST205/75R15	D/8	7.8	26.9	2200	70
15306	ST225/75R15	D/8	8.4	28.1	2540	65
15307	ST225/75R15	E/10	8.4	28.1	2860	80
15308	ST235/80R16	E/10	9	30.6	3520/3100*	80
15310	ST235/80R16	F/12	9	30.6	3860/3420*	95
15311	ST235/85R16	F/12	9.1	31.4	3970/3525*	95

*DUAL

KEY FEATURES:

- Enhanced sidewall compound to extend tire life and deter ozone influence
- **Max PSI inflation shield**
- Low ambient noise output stems from computer optimized pitch sequence
- **Computer optimized footprints for excellent wear across many different loads**
- **Road gripping tread design with the wide channels for water dispersion**
- 5 year warranty includes a 1 year unlimited warranty and a 4 year limited warranty

DESIGNED AND ENGINEERED IN THE USA





LOADSTAR M/T KR29

shown on Mod Sportsman Camo wheel



PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
15309	ST235/75R15	D	9.3	29.0	2860	65



LOADSTAR RADIAL S-TRAIL KR25

shown on AM01 Black wheel



PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
10130	ST145R12	D	5.8	21.4	1220	65
10140	ST145R12	E	5.8	21.4	1520	80



KARRIER RADIAL H/D KR18

shown on AM05 wheel



PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
10500	ST235/85R16	E	9.3	31.6	3640/3200*	95
10501	ST235/85R16	F	9.3	31.6	3960/3520*	110

*DUAL



KARRIER RADIAL H/D KR17

shown on Split Spoke Aluminum wheel



PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
10316	ST215/65R17	C	8.5	28.0	1874	50

ADDITIONAL HEAVY DUTY RADIALS



PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)	SPEED RATING
10304TR	ST225/75R15	G	8.8	28.3	3420/3000*	110	M
10551TR	ST235/80R16	G	9.25	30.8	4080/3640*	110	N
10552TR	ST235/85R16	G	9.25	31.7	4400/3860*	110	N
10285TR	LT215/75R17.5	M	8.3	30.2	4805/4540*	120	M
10305TR	LT235/75R17.5	M	9.2	31.4	6010/5675*	125	M

*DUAL



shown on Spoke White with Stripe wheel



LOADSTAR BIAS K353

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
10010	570-8	B	5.8	18.0	715	50
10012	570-8	C	5.9	18.0	913	75
10013	570-8	D	5.5	18.0	1078	100
10060	480-12	B	4.8	20.5	781	60
10062	480-12	C	4.8	20.5	990	89
10064	530-12	B	5.6	21.9	836	55
10066	530-12	C	5.6	21.9	1045	80
10068	530-12	D	5.5	21.9	1243	105



shown on Directional Chrome wheel



LOADSTAR BIAS K364

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
10040	6.90/6.00-9	C	6.5	21.1	1298	60



shown on Solid Center Galvanized wheel



LOADSTAR BIAS K371

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
10002	4.80/4.00-8	B	4.6	16.1	590	60
10004	4.80/ 4.00-8	C	4.7	16.1	745	90



shown on Mod Silver wheel



LOADSTAR BIAS K550

- Bias tire with low rolling resistance for improved handling and ride
- Tread profile design allows for increased towing stability

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
1ST76	ST175/80D13	C	6.8	24.0	1360	50
1ST77	ST175/80D13	D	6.8	24.0	1610	65
1ST79	ST185/80D13	D	7.2	24.4	1710	65
1ST86	ST205/75D14	C	7.8	26.3	1760	50
1ST90	ST215/75D14	C	8.4	26.6	1870	50
1ST92	ST205/75D15	C	7.8	27.4	1820	50
1ST95	ST205/75D15	D	7.8	27.4	2150	65
1ST96	ST225/75D15	D	8.6	28.1	2540	65



shown on Spoke White with Stripe wheel



LOADSTAR ST BIAS K558

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)
1ST51	ST175/80D13	C	6.6	24.0	1360	50
1ST52	ST205/75D14	C	7.8	26.3	1760	50
1ST54	ST205/75D15	C	7.7	27.4	1820	50
1ST58	ST225/75D15	D	8.6	28.3	2540	65



shown on Solid Center Silver wheel

8"-10" WIDE PROFILE



LOADSTAR BIAS WIDE K399

PART #	SIZE	PLY	S.W (INCH)	O.D. (INCH)	CAPACITY (LBS)	MAX (PSI)	SPEED RATING
1HP22	165/65-8	C	6.6	16.5	803	70	J
1HP26	215/60-8	C	8.9	18.3	935	50	M
1HP28	215/60-8	D	8.9	18.3	1166	70	M
1HP52	205/65-10	C	8.3	20.5	1100	50	M
1HP56	205/65-10	E	8.4	20.4	1650	89	N
1HP60	225/55B12	E	8.9	21.8	2464	100	J



AM09 SERIES ALUMINUM WHEELS

SATIN BLACK	BLACK MACHINED	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
26027	26028	13x4.5	5-4.5	3.19"	1740
26031	26032	14x5.5	5-4.5	3.19"	2200
26036	26037	15x6	5-4.5	3.19"	2540
26041	26042	15x6	6-5.5	3.74"	2960
26046	26047	16x6	6-5.5	4.90"	3580
26051	26052	16x6	8-6.5	4.90"	4400
-	26057*	18x9	5-4.5	3.19"	2350
26056	26062	17.5x8	8-6.5	4.77"	6005

* OFFSET +.10



AM08 SERIES ALUMINUM WHEELS

BLACK MACHINED	WHITE MACHINED	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
26008	26009	13x4.5	5-4.5	3.19"	1740
26010	26011	14x5.5	5-4.5	3.19"	2200
26014	26015	15x6	5-4.5	3.19"	2540
26018	26019	15x6	6-5.5	3.74"	2960
26021	26022	16x6	6-5.5	4.90"	3580
26024	26025	16x6	8-6.5	4.90"	4400



AM07 SERIES ALUMINUM WHEELS

BLACK MACHINED	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
25998	14x5.5	5-4.5	3.19"	2300
25999	18x9	5-4.5	3.19"	2200



AM06 SERIES ALUMINUM WHEELS

BLACK MACHINED WITH OPTIONAL COLOR INSERTS

- One wheel with 3 different looks
- Keep inventory costs down with color kits instead of multiple wheels
- Offset -0.60

BLACK MACHINED	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
26000	13x4.5	5-4.5	3.19	1740
26001	14x5.5	5-4.5	3.19	1900
26002	15x5	5-4.5	3.19	2200
26003	15x6	5-4.5	3.19	2540
26004	15x6	6-5.5	3.74	2960
26005	16x6	6-5.5	3.74	3300
26006	16x6	8-6.5	4.90	4400
26007	17x7	5-4.5	3.19	1900



AM05 SERIES ALUMINUM WHEELS

BLACK MACHINED	SILVER MACHINED	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
22189BM	22189SM	12x4.5	5-4.5	3.19"	1520
22190BM	22190SM	13x4.5	5-4.5	3.19"	1660
22191BM	22191SM	14x5.5	5-4.5	3.19"	2200
22192BM	22192SM	15x6	5-4.5	3.19"	2150
22193BM	22193SM	15x6	6-5.5	3.75"	2830
22194BM	22194SM	16x6	6-5.5	3.75"	3200
22195BM	22195SM	16x6	8-6.5	4.90"	3750



AM06 OPTIONAL COLOR INSERT KITS

INSERTS SHOWN PARTIALLY INSTALLED

FIRE ENGINE RED

PART #	WHEEL SIZE	FITS BOLT PATTERN
26710	13"	5 - 4.5
26711	14"	5 - 4.5
26712	15"	5 - 4.5
26713	15"	6 - 5.5
26715	16"	6 - 5.5
26716	16"	8 - 6.5
26717	17"	5 - 4.5

BRIGHT OCEAN BLUE

PART #	WHEEL SIZE	FITS BOLT PATTERN
26720	13"	5 - 4.5
26721	14"	5 - 4.5
26722	15"	5 - 4.5
26723	15"	6 - 5.5
26725	16"	6 - 5.5
26726	16"	8 - 6.5
26727	17"	5 - 4.5

EXCLUSIVE ALUMINUM WHEELS



AM01 SERIES ALUMINUM WHEELS

BLACK MACHINED	GUN METAL MACHINED	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
23008	23015	12x4	5 - 4.5	3.19"	1520
23009	23016	13x4.5	5 - 4.5	3.19"	1740
23010	23017	14x5.5	5 - 4.5	3.19"	2150
23011	23018	15X6	5 - 4.5	3.19"	2540
23012	23019	15X6	6 - 5.5	3.75"	2960
23013	23020	16x6.5	6 - 5.5	3.75"	3580
23014	23021	16x6.5	8 - 6.5	4.90"	3960



AM02 SERIES ALUMINUM WHEELS

BLACK MACHINED	BLACK	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
24030	-	10x6	5 - 4.5	3.19"	1500
24008	24022	12x4	5 - 4.5	3.19"	1520
24009	24023	13x4.5	5 - 4.5	3.19"	1740
24010	24024	14x5.5	5 - 4.5	3.19"	2150
24011	24025	15X6	5 - 4.5	3.19"	2540
24012	24026	15X6	6 - 5.5	3.75"	2960
24013	24027	16x6.5	6 - 5.5	3.75"	3580
24014	24028	16x6.5	8 - 6.5	4.90"	3960



AM03 SERIES ALUMINUM WHEELS

Available in 6 Colors/Finishes

MATTE BLACK	MATTE BLACK MACHINED	BLACK MACHINED	BLACK	SILVER	GUN METAL	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
23157	23158	23153	23152	23151	23154	13x4.5	5 - 4.5	3.19"	1740
23107	23108	23103	23102	23101	23104	14x5.5	5 - 4.5	3.19"	2200
23117	23118	23113	23112	23111	23114	15X5	5 - 4.5	3.19"	2200
23127	23128	23123	23122	23121	23124	15X6	6 - 5.5	3.74"	2960
-	-	23139	-	-	-	16x6	6 - 5.5	3.74"	3640
23137	23138	23133	23132	23131	23134	16x6.5	8 - 6.5	4.90"	4400

SPLIT SPOKE ALUMINUM & BLACK



ALUMINUM	BLACK	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
22323JF	22323JFB	13X4.5	5 - 4.5	3.19	1725
22330JF	22330JFB	14X5.5	5 - 4.5	3.19	2040
22647JF	22647JFB	15X6	5 - 4.5	3.19	2540
22648JF	22648JFB	15X6	6 - 5.5	3.74	2830
22658JF	22658JFB	16X6.5	6 - 5.5	3.74	3200
22660JF	22660JFB	16X6.5	8 - 6.5	4.90	3960



5-STAR ALUMINUM

PART #	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY LBS
20164	12X4	4 - 4	2.81	1220
20163	12X4	5 - 4.5	2.81	1520
20258	13X5	5 - 4.5	3.19	1660
20305	14X5.5	5 - 4.5	3.19	1900
20518	15X6	5 - 4.5	3.74	2150
20516	15X6	6 - 5.5	3.74	2830



7-STAR ALUMINUM

PART #	SIZE	BOLT PATTERN	CAPACITY LBS
22321JF	13X4.5	5 - 4.5	1725
22329JF	14X5.5	5 - 4.5	2040
22653JF	15X6	5 - 4.5	2540



ALUMINUM MOD MACHINED/CLEAR COATED

PART #	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY LBS
22627JF	15X6	5 - 4.50	3.19	2150
22646JF	15X6	6 - 5.50	3.74	2830
22664JF	16X6	6 - 5.50	3.74	3200
22656JF	16X7HD	8 - 6.50	4.90	3960
22702JF	17.5X6.75HD	8 - 6.50 *5/8 stud	4.77	6050



SPORTSMAN CAMO



TrueTimber STRATA	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
27001	13x4.5	5-4.5	3.19	1725
27002	14x5.5	5-4.5	3.19	2200
27003	15x5	5-4.5	3.19	2200
27004	15x6	6-5.5	4.27	2860



MOD BLACK WITH RED STRIPES

BLACK WITH RED STRIPE	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
20245RS	13x4.5	5-4.5	3.19"	1725
20315RS	14x5.5	5-4.5	3.19"	2200
20440RS	15x5	5-4.5	3.19"	2200
20560RS	15x6	6-5.5	4.27"	2860
20761BRS	16x6	8-6.5	4.90"	3750



MOD NARDO GREY WITH BLACK STRIPES

NARDO GREY	SIZE	BOLT PATTERN	PILOT (INCHES)	CAPACITY (LBS)
20286	13x4.5	5-4.5	3.19"	1725
20384	14x5.5	5-4.5	3.19"	2200
20476	15x5	5-4.5	3.19"	2200
20597	15x6	6-5.5	4.27"	2860
20812	16x6	8-6.5	4.90"	3750



GALVSTAR

- Superior oxidation protection on an American Made steel wheel
- Triple protected with a proprietary blend of galvanization under the e-coat
- Textured finished coat reminiscent of durable truck bed liner

PEBBLED DARK SILVER	PEBBLED BLACK	SIZE	BOLT PATTERN	PILOT	CAPACITY (LBS)
2GV17	2GV18	14x5.5	5-4.5	3.19	2200
2GV21	2GV22	15x5	5-4.5	3.19	2200
2GV25	2GV26	15x6	6-5.5	4.27	2860
2GV39	2GV40	16x6	8-6.5	4.90	3750



12"-16" MOD

WHITE W/STRIPES	WHITE W/O STRIPES	SILVER	BLACK	SIZE	BOLT PATTERN	PILOT	OFF-SET	CAPACITY (LBS)	GALVANIZED	CAPACITY (LBS)
20137	20140	-	20155	12x4JA	4-4.0	2.84	0	1250	20139	1250
20142	20151	20147	20153	12x4JA	5-4.5	3.19	0	1250	20144	1250
20149	-	20165	20168	12x4JA	5-4.5	3.19	-.50	1520	20167 HD	1520
20236	20250	-	20242	13x4.5JJ	4-4.0	2.65	0	1660	-	-
20252	20253	20244	20245	13x4.5JJ	5-4.5	3.19	0	1725	20254	1660
20362	20365	20363	20315	14x5.5JJ	5-4.5	3.19	0	2200	20364	1870
20442	20443	20436	20440	15x5JJ	5-4.5	3.19	0	2200	-	-
20446	20439	20427	20438	15x5JJ	5-5.0	3.19	0	2200	-	-
20543	20551	20537	20545	15x6JJ	5-4.5	3.19	0	2200	20544	2150
20553	20552	20539	20560	15x6JJ	6-5.5	4.27	0	2860	20554	2830
20748	20742	20746	20757	16x6K	6-5.5	4.27	0	3520	20744	3050
20795	20759	20808	-	16x6K	8-6.5	4.90	+.50	3750	-	-
20761	20762	20760	20761B	16x6K	8-6.5	4.90	0	3750	-	-
20785	20789	20794	20799	16x6K	8-6.5	4.90	0	4400	-	-
-	20793	-	-	16x6K	8-6.5	4.90	+.50	4400	-	-



13"-16" Conventional

BLACK	WHITE	GALVANIZED	SIZE	BOLT PATTERN	PILOT	OFFSET	CAPACITY (LBS)
20214	20212	-	13x4.5JJ	5-4.5	2.62	+.50	1480
20304	20334	-	14x5.5JJ	5-4.5	2.62	+.50	1865
20504	20412	-	15x6JJ	5-4.5	2.62	+.50	1820
20404	-	-	15x5K	5-4.5	2.62	+.50	1820
20514	-	-	15x6JJ	6-5.5	3.65	0	2600
20758	-	-	16x6K	6-5.5	3.65	0	3050
20766	-	-	16x6K	8-6.5	4.89	+.50	3750
20772	-	20713	16x6K	8-6.5	4.89	+.50	4400

Inset = Positive [+] moves tire towards the centerline of the trailer.

Outset = Negative [-] moves tire away from centerline of trailer.

*Painted wheels have e-coat and powder coat finish for a long lasting finish.



12"- 16" SPOKE

WHITE W/STRIPES	WHITE W/O STRIPES	SILVER	BLACK	SIZE	BOLT PATTERN	PILOT	CAPACITY (LBS)	GALVANIZED	CAPACITY (LBS)
20122	20123	-	-	12x4J	4-4.0	2.84	1250	20124	1250
20132	20131	20135	20138	12x4J	5-4.5	3.19	1250	20134	1250
-	-	-	-	12x4	5-4.5	3.19	1520	20169HD*	1520
20222	20223	20225	-	13x4.5J	4-4.0	2.65	1660	20224	1360
20232	20231	20233	20235	13x4.5J	5-4.5	3.19	1725	20234	1660
20352	20351	20302	20353	14x5.5J	5-4.5	3.19	2200	-	-
20373	-	20349	-	14x6	5-4.5	3.19	1870	20354	1870
20422	20421	20424	20426	15x5J	5-4.5	3.19	2200	20423	2150
20428	-	-	-	15x5J	5-5.0	3.19	2200	-	-
20522	20521	20519	20527	15x6J	5-4.5	3.19	2200	20524	2150
20528	20525	-	-	15x6J	5-5.0	3.19	2200	-	-
20532	20531	20535	20561	15x6J	6-5.5	4.27	2860	20534	2830
20740	20741	-	20741B	16x6K	6-5.5	4.27	3500	20747	3050
20751	20750	20776	20773	16x6K	8-6.5	4.90	3750	-	-
20769	20768	20767	-	16x6HD	8-6.5	4.90	4100	20781HD	4100
20769-I	-	-	24200	16x6HD	8-6.5	4.90	4400	-	-

*OFFSET -0.50



8"- 13" SOLID CENTER

WHITE	GALVANIZED	SILVER	BLACK	SIZE	BOLT PATTERN	PILOT	CAPACITY (LBS)
20001	20003	20009	20036	8x3.75	4-4.0	2.50	900
20006	20008	20007	-	8x3.75	5-4.5	2.81	900
20011	20013	-	-	8x5.375	4-4.0	2.50	900
20016	20018	20017	-	8x5.375	5-4.5	2.81	900
20021	20023	20019	-	8x7	4-4.0	2.50	900
20026	20028	20027	-	8x7	5-4.5	2.81	900
20041	20043	20042	20044	10x6	4-4.0	2.50	1725
20046	20048	20047	20056	10x6	5-4.5	2.81	1650
20053	-	-	-	10x6	5-5.5	4.00	1800
20102	-	-	-	12x4	4-4.0	2.84	1250
20112	-	-	-	12x4	5-4.5	3.19	1250
20202	-	-	-	13x4.5J	4-4.0	2.65	1660
20204	-	-	20209	13x4.5	5-4.5	3.19	1660



13"-15" DIRECTIONAL

SILVER	SIZE	BOLT PATTERN	PILOT	CAPACITY (LBS)
20259	13 x 4.5	5-4.5	3.19	1480
20377	14 x 5.5	5-4.5	3.19	1930
20447	15 x 5	5-4.5	3.19	2150
20563	15 x 6	5-4.5	3.19	2150
20579	15 x 6	6-5.5	4.27	2600

Inset = Positive [+] moves tire towards the centerline of the trailer; | Outset = Negative [-] moves tire away from centerline of trailer.
*Painted wheels have e-coat and powder coat finish for a long lasting finish.



17.5" x 6.75" HUB PILOTED SINGLE

W/8 MOD HAND HOLES (FOR TRAILERS WITH DISC BRAKES)

BLACK	SILVER	BOLT PATTERN	PILOT	OFFSET	CAPACITY (LBS)
-	24147	8-6.5	4.76	-0.50	6005
22480	22479	8-6.5	4.76	+0.50	6005
-	22477	8-6.5	4.76	+0.19	6005



17.5" x 6.75" HUB PILOTED SINGLE SOLID CENTER

BLACK	WHITE	SILVER	GRAY	GALVANIZED	BOLT PATTERN	PILOT	OFFSET	CAPACITY (LBS)
24157	24150	24148	22437	22439	8-6.5	4.76	-0.50	6005
22440	24138	24140	20736	22444	8-6.5	4.76	+0.19	6005
-	-	-	22452	22454	8-6.5	4.76	-0.31	6005



17.5" x 6.75" DUAL

W/2 OVAL HAND HOLES, HUB PILOTED (FOR TRAILERS WITH DISC BRAKES)

WHITE	BLACK	SILVER	BOLT PATTERN	PILOT	OFFSET	CAPACITY (LBS)
22467	22464	22465	8-6.5	4.76	5.59	6200

W/4 MOD HAND HOLES, HUB PILOTED

BLACK	WHITE	GALVANIZED	BOLT PATTERN	PILOT	OFFSET	CAPACITY (LBS)
22707B	22707	22414	8-10.8	8.70	5.59	6200

W/2 MOD HAND HOLES, STUD PILOTED

WHITE	BOLT PATTERN	PILOT	OFFSET	CAPACITY (LBS)
22710IMP	10-10.83	6.46	6.19	6200

Inset = Positive [+] moves tire towards the centerline of the trailer.

Outset = Negative [-] moves tire away from centerline of trailer.

*Painted wheels have e-coat and powder coat finish for a long lasting finish.

STEEL TRAILER WHEELS



DUAL WHEELS

SPECIFICATIONS

WHITE	GRAY E-COAT	BLACK	SILVER	SIZE	BOLT PATTERN	PILOT	OFFSET	CAPACITY (LBS)
-	20777	-	-	16x6K	8-6.5	4.88	5.50	3500
-	20783	-	20798	16x6K	8-6.5	4.76	5.50	3300
-	-	20779B	20779	16x6K	8-6.5	4.77	5.50	3500
-	20783	-	-	16x6K	8-6.5	4.76	5.35	3200
24159	-	24158	24160	16x6K	8/6.5	4.77	5.35	3860



14.5" MOBILE HOME RIMS

SPECIFICATIONS: STANDARD

BLACK	RIM SIZE	MOUNTING	CAPACITY (LBS)
20800	14.5x6 MH	rim clamps	3100

rim is not to be remounted

SPECIFICATIONS: DEMOUNTABLE

E-COAT GRAY	RIM SIZE	MOUNTING	CAPACITY (LBS)
20802	14.5x6 MH	rim clamps	3050

Inset = Positive [+] moves tire towards the centerline of the trailer.
Outset = Negative [-] moves tire away from centerline of trailer.



TIRE & WHEEL ACCESSORIES

Part No.	Bore Size (inches)	Fits Wheel Sizes	Description
STAINLESS STEEL CENTER CAP			
90175	3.19"	12, 13, 14,& 15" 5H	w/Black Button
90175L	3.19"	12, 13, 14,& 15" 5H	w/Chrome Button
90176	3.19"	12, 13, 14,& 15" 5H	w/Chrome Button
90159	3.75"	15 6H, 16 6H*	w/Chrome button
90077	4.25"	15 & 16" 6H	w/Black Button
90077c	4.25"	15 & 16" 6H	w/Chrome Button
90156	4.82"	16" 8H 3960lbs	w/Black Button
90156c	4.82"	16" 8H 3960lbs	w/Chrome Button
90078	5.12"	16" 8H 3200lbs	w/Black Button
90078c	5.12"	16" 8H 3200lbs	w/Chrome Button
CHROME PLATED STEEL CENTER CAP			
90113	2.80"	12 & 13" 4H, 10" 4H & 5H	Closed End
90153	3.19"	12, 13, 14,& 15" 5H	Closed End
OPEN END CENTER CAP CHROME PLATED STEEL			
90102	3.33"	13 & 14" 5H	w/Black Button
90160C	3.75"	15 6H 16 6H*	w/Chrome Button
90154	4.25"	15 & 16" 6H	w/Black Button
90154C	4.25"	15 & 16" 6H	w/Chrome Button
90121	3.18"	12, 13, 14,& 15" 5H	w/Black Button
90121C	3.18"	12, 13, 14,& 15" 5H	w/Chrome Button
90083C	5.12"	13 & 14" 5H	w/Chrome Button
90195	3.33"	13 & 14" 5H	w/Chrome Button
90114	4.90"	16" 8H	w/Chrome Button
OPEN END CENTER CAP BLACK			
90165	3.19"	12, 13, 14,& 15" 5H	Black w/Black Button
90182	4.25"	15 & 16" 6H	Black w/Black Button
90183	3.75"	15 & 16" 6H	Black w/Black Button
90156B	4.82"	16" 8H	Black w/Black Button
90160ACB	3.75"	15 6H*	Chrome w/ Black Button
LARGE CAP			
90080	4.77"	17.5"	Chrome

* check application

LUG NUTS		
Part No.	Size	Material
09905	1/2 x 20 x 7/8" 3/4"HEX	Zinc Plated Open Acorn Bulge Nut
09905B	1/2 x 20 x 7/8" 3/4"HEX	Black Zinc Plated Open Acorn Bulge Nut
09914	1/2 x 20 x 1-3/8" 3/4"HEX	Black Acorn Bulge Closed End Nut
09923	9/16 x 18 x 1-3/4" 3/4"HEX	Black HD Acorn Bulge Nut 2 piece
90050	1/2 x 20 x 1-1/2" 13/16"HEX	Chrome Plated Acorn Nut
90052	1/2 x 20 x 1-7/8" 13/16"HEX	Chrome Plated Acorn Nut
80096	1/2 x 20 x 1-7/8" 13/16"HEX	Chrome Plated Acorn Nut
90049	1/2 x 20 x 1-3/4" 3/4"HEX	Chrome Plated Bulge Nut 2 piece
90070	1/2 x 20 x 1-7/8 7/8"HEX	Stainless Steel Capped Acorn Nut
90067	9/16 x 18 x 1-7/8" 7/8"HEX	Stainless Steel Capped Acorn Nut
90051	1/2x20x1-7/8" 3/4"HEX	Stainless Steel Capped
09911	1/2 x 20 x 1-3/8" 3/4"HEX	Chrome Acorn Bulge Nut 2 piece
90129	5/8" x 18	Flange Lug Nut for 17.5" Wheels

IMPORTANT SAFETY INFORMATION

Improperly clamped wheels may loosen and could come off unexpectedly while traveling, resulting in a dangerous situation. It is recommended that all wheel fasteners be checked frequently and retorqued to the appropriate level as needed.

Also of vital importance is understanding the different wheel clamping systems. Smaller steel wheels up to and including some 16" varieties are normally stud piloted and will typically use a 60-degree cone nut. The cone portion of the nut mates to a matching cone seat in the wheel center. These are generally 1/2" - 20 or 9/16" - 18 thread sizes. There are some larger wheels that are designed to be clamped with 5/8" nuts featuring a 90-degree cone seat. This type of wheel generally does not have a center hole that closely fits the hub.



106ESS-60

We carry a full line of wheel accessories, from wheel caps to valves to lug nuts.

Call any one of our locations for more details about these accessories.



20903

20904

20906

90070

Part No.	TR Part No.	Length (inches)	Rim Hole
VALVES			
20902	TR-412	1"	.453 Snap in
20903	TR-413	1-1/4"	.453 Snap in
20905	TR-415	1-1/4"	.625 Snap in
20906	TR-416	1-1/4"	.453 Snap in
20904	600HP	1-1/4"	.453 Snap in
20901	TR-600HP	1-1/4"	.453 Snap in
20907	800HP	1-1/2"	.453 Snap in
20914	TR-501 Brass	1-1/2"	0.625
20916	TR-500 Brass	2"	0.625
20911	TR-573 Brass	3-3/4"	0.625
20917	TR-574 Brass	4-3/8"	0.625
20918	TR-574 Double Bend Brass	-	0.625
20919	Bottom Mount 21° Bend	-	0.625
20923	US725S Alum Bolt On	-	.548

90-degree cone nuts must NEVER be used in 60-degree cone seat wheels. The use of mismatched nuts will result in a loss of clamping force and can cause wheel run-off.

Larger wheels generally will be hub piloted and require either clamping rings with 90 degree cone nuts to attach them to the hub or they can be mounted with flange nuts directly on the wheel. The benefit of the clamp ring system is they require lower torque. Both of these mounting systems typically use 9/16" - 18" or 5/8" - 18 thread size. Hub piloted wheels require a close fit of the center hole to the hub.

Make sure you understand the requirements of the wheels and clamping systems that you specify for your vehicles. Misuse can result in costly and dangerous failures.

See AmericanaTire.com for current specifications



americanatire.com



Elkhart, IN
574-522-9450
Fax: 574-522-9680
atw-elkhart@americanatire.com

York, PA
717-793-9700
Fax: 717-793-9701
atw-york@americanatire.com

Blackshear, GA
912-449-4414
Fax: 912-449-4166
atw-blackshear@americanatire.com

Marshfield, MO
417-468-1650
Fax: 417-468-1362
atw-marshfield@americanatire.com

Lakeland, FL
813-896-0669
atw-lakeland@americanatire.com

**CORPORATE
HEADQUARTERS**
Reynoldsburg, OH
866-536-3287
Fax: 614-866-9805
info@americanatire.com



Part# CATATW26
©2026 Kenda Tire All Rights Reserved